


Ø114 Steel Round Bollard

Knock-on Cap | Removable Padlock

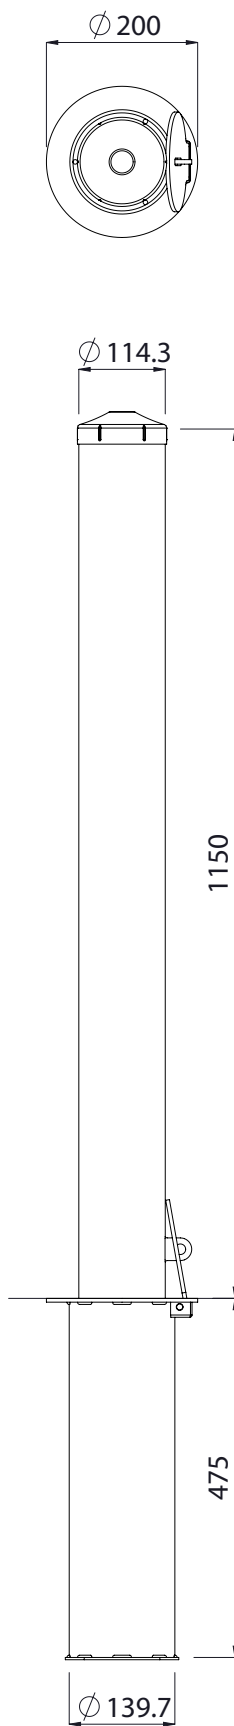

Colours / finishes shown are indicative only and may differ in reality.

SPECIFICATIONS

Code	M114R-115PRGR - Hot Dip Galv M114R-115PRPR - Galv Powdercoat Bollard - Hot Dip Galv Socket
Material	Mild Steel
Height	1150mm Above Ground 475mm into Socket (1625mm Overall)
Diameter	$\varnothing 114.3 \times 4.5$ mm Wall Tube
Weight	20 Kg (Removable Bollard)
Mounting	Socket Cast into Concrete 475mm Deep Bollard Lug Padlocked to Socket Cover

FEATURES

- Removable and Padlockable bollard
- Knock-on cap
- Hot Dip Galvanised for long life
- Can be Powdercoated a range of colours
- Wheel friendly flush closing inground socket cover when bollard is removed

- Bollards are not supplied with installation instructions, install fastenings or footing details. These are to be specified and determined by the installing contractor for the specific requirements of each site.