


Ø114 Steel Round Bollard

Knock-on Cap | Removable Padlock

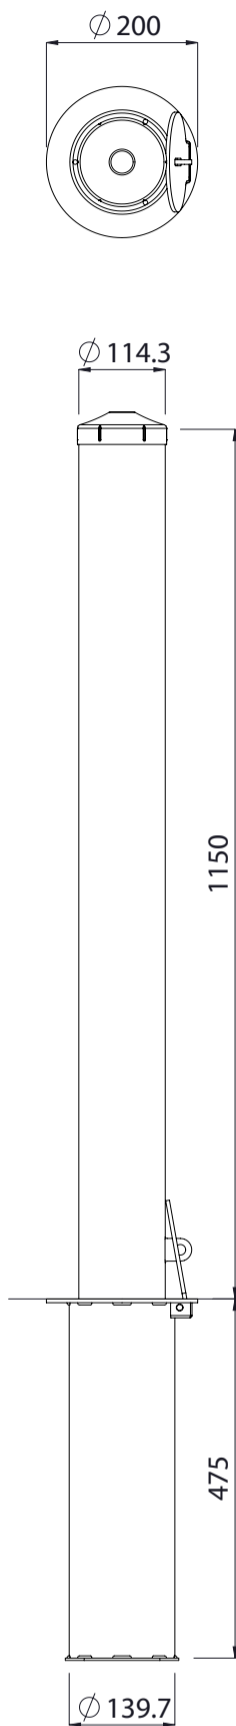

Colours / finishes shown are indicative only and may differ in reality.

	SPECIFICATIONS	FEATURES
Code	M114R-115PRGR - Hot Dip Galv M114R-115PRPR - Galv Powdercoat Bollard - Hot Dip Galv Socket	<ul style="list-style-type: none"> • Removable and Padlockable bollard • Knock-on cap • Hot Dip Galvanised for long life • Can be Powdercoated a range of colours • Wheel friendly flush closing inground socket cover when bollard is removed
Material	Mild Steel	
Height	1150mm Above Ground 475mm into Socket (1625mm Overall)	
Diameter	$\varnothing 114.3 \times 4.5$ mm Wall Tube	
Weight	20 Kg (Removable Bollard)	
Mounting	Socket Cast into Concrete 475mm Deep Bollard Lug Padlocked to Socket Cover	

- Bollards are not supplied with installation instructions, install fastenings or footing details. These are to be specified and determined by the installing contractor for the specific requirements of each site.